
Durwen products for all your needs



DURWEN SUPPORT WORLDWIDE





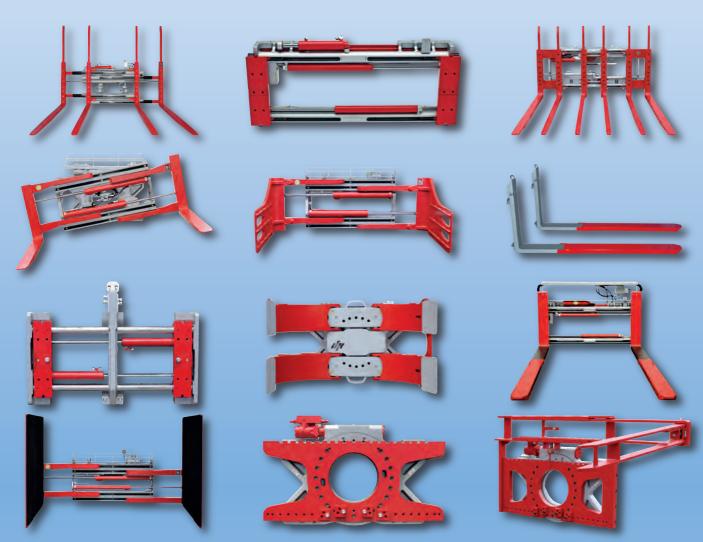

More than 70 years experience


Durwen Maschinenbau GmbH August-Horch-Straße 5 56637 Plaidt - Germany

Phone: +49 26 32-70 00-0 Fax: +49 26 32-70 00 - 299

export@durwen.de www.durwen.de









QUICK-CHANGE SYSTEM SWV

INNOVATIVE - VERSATILE - DURABLE






















QUICK-CHANGE SYSTEM

Mechanical locking mechanism

By using the Durwen **quick-change system**, attachments can be interchanged fast, safe and easy. This system is primarily used for forklift trucks to be employed in various applications which need a number of different attachments. As standard, the lower locking mechanism is mechanical. The attachment is hooked onto the front part of the quick-change system. Integral design for your mast as well as for various attachments is available upon request.

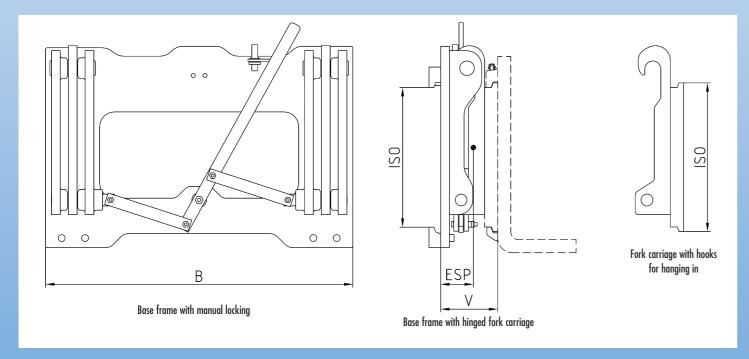

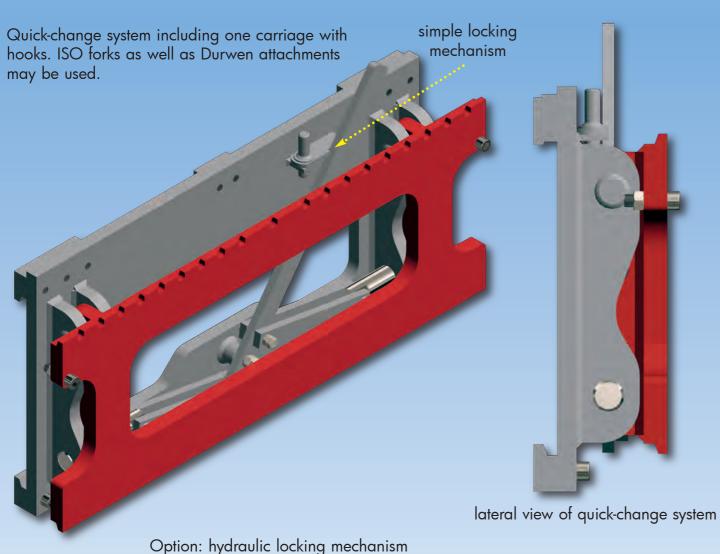

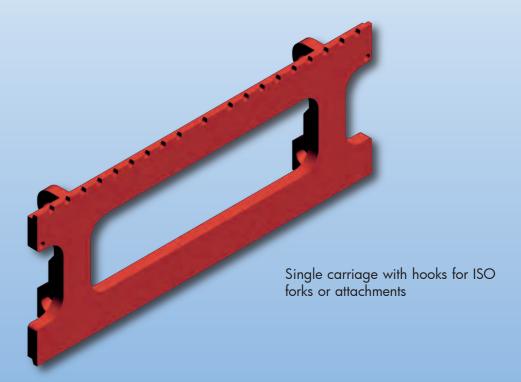

Quick-change system, base frame to hook onto the original carriage of the forklift truck.

type	capacity kg LC mm	for forklift to LC mm	ISO	B mm	LLC mm	COG mm	weight kg
SWV 25	2500/600	2500/600	II	1050	110	30	115
SWV 35	3500/600	3500/600	III	1050	150	32	145
SWV 45	5000/600	5000/600	III	1050	160	38	205

Quick-change system incl. one fork carriage with hooks, ISO forks as well as Durwen attachments can be mounted.

type	capacity kg LC mm	for forklift to LC mm	ISO	B mm	LLC incl. carriage mm	COG mm	weight kg
SWV-GT 25	2500/600	2500/600		1050	140	72	205
SWV-GT 35	3500/600	3500/600	III	1150	195	80	310
SWV-GT 45	5000/600	5000/600	III	1350	205	85	355

Single carriage with hooks, for additional ISO forks or Durwen attachments.

type	ISO	B mm	weight kg	
fork carriage for SWV 25	II	1050	90	
fork carriage for SWV 35	III	1150	105	
fork carriage for SWV 45	III	1350	145	

multiple quick coupling upon request

forks not included

option constant sideshift (requires one additional hydraulic function)	add-on weight kg	increase of LLC mm
constant sideshift ISO II	+20 kg	+17 mm
constant sideshift ISO III	+25 kg	+17 mm

- hydraulic locking upon request
- parking stand rack for attachments upon request
- integrated version upon request

Are you looking for a digital version export@durwen.de

